
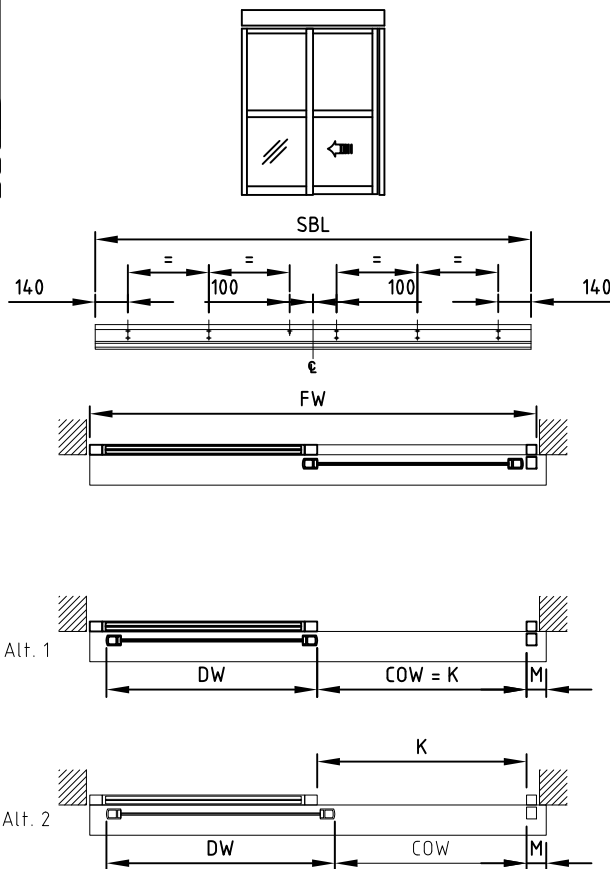


© All rights in and to this material are the sole property of Entrematic AB. Rights reserved for changes without prior notice. Copying, scanning, alterations or modifications are expressly forbidden without the prior written consent of Entrematic AB. Rights reserved for changes without prior notice.

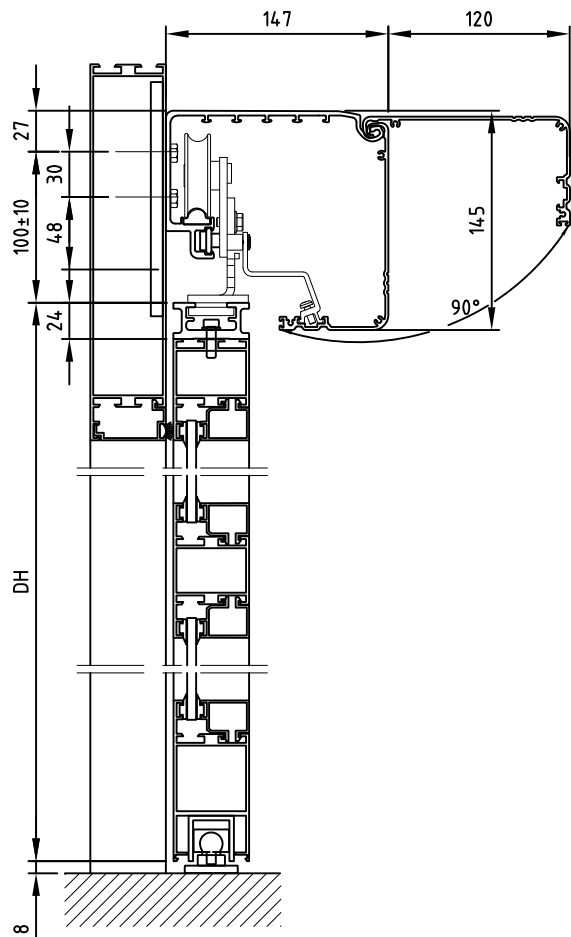

- FW= Frame width, Max. 5884
- FH= Frame height, Max. 3000
- COH= Clear opening height
- COW= Clear opening width
- CL= Cover length incl end plates
- DH= Door leaf height
- SBL= Support beam length
- M= Cover overlap, Min 100
- DW= Door width (If door adaptor state DW)
- K= Clear opening width, fixed screens

State when ordering

- Alt. 1
- Alt. 2
- Left opening
- Right opening
- FW=.....mm
- FH=.....mm
- COH=.....mm
- COW=.....mm
- CL=.....mm
- See 1000157

Surface treatment

- Silver anodized
- Special anodized.....
- Powder coated
- Colour

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Sliding door operator
EMSL-1 L/R
Left opening shown



6

833082-EME1